


# Certikin DENVER Pumps


## Certikin DENVER Pump

- Self priming
- Built-in pre-filter
- Polypropylene body
- Noryl impellor
- Motor IP55 protection rated
- 316 stainless steel shaft
- 2" connections

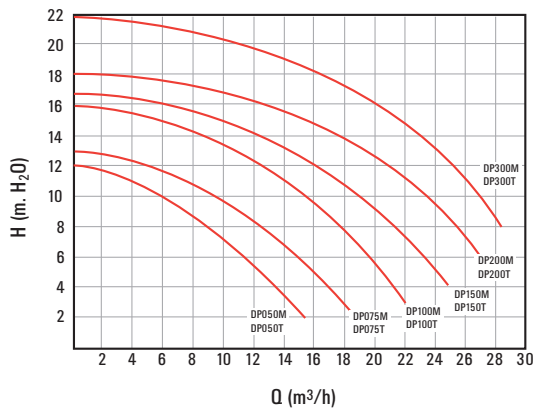

## Certikin DENVER Pumps

Code	Description	Phase
DP050M	DENVER pump 0.50HP II	1
DP050T	DENVER pump 0.50HP III	3
DP075M	DENVER pump 0.75HP II	1
DP075T	DENVER pump 0.75HP III	3
DP100M	DENVER pump 1HP II	1
DP100T	DENVER pump 1HP III	3
DP150M	DENVER pump 1.5HP II	1
DP150T	DENVER pump 1.5HP III	3
DP200M	DENVER pump 2HP II	1
DP200T	DENVER pump 2HP III	3
DP300M	DENVER pump 3HP II	1
DP300T	DENVER pump 3HP III	3

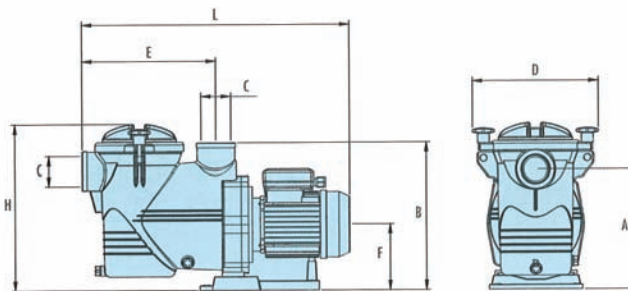

## Certikin DENVER Pump Specifications

Code	kW	CV	Dimensions								KG	Volume m <sup>3</sup>
			A	B	C	D	E	F	H	L		
DP050M / DP050T	0.37	1/2	250	312	2"	280	282	140	348	565	12.5	0.072
DP075M / DP075T	0.55	3/4	250	312	2"	280	282	140	348	565	13	0.072
DP100M / DP100T	0.75	1	250	312	2"	280	282	140	348	565	14	0.072
DP150M / DP150T	1.10	1.5	250	312	2"	280	282	140	348	590	17	0.072
DP200M / DP200T	1.50	2	250	312	2"	280	282	140	348	605	19.5	0.072
DP300M / DP300T	2.20	3	250	312	2"	280	282	140	348	625	22.5	0.072